

MIL-W-1940/1~11W

LD PUMPED ALL-SOLID-STATE INFRARED LASER AT 1940nm


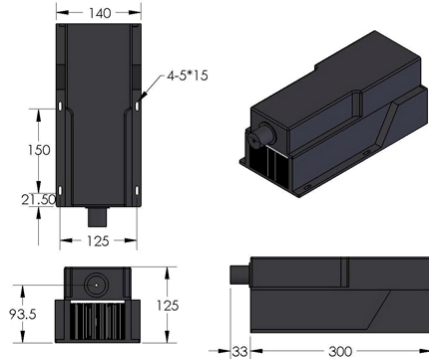

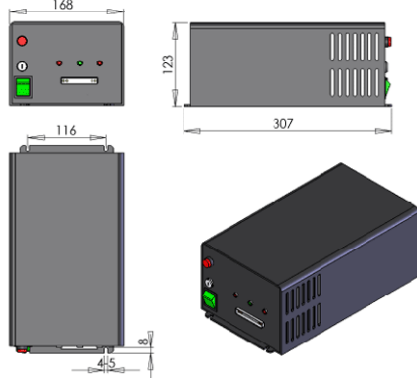
All solid state infrared laser module at 1940nm is made features of ultra compact, long lifetime, low cost and easy operating, which is used in measurement, communication, spectrum analysis, etc.



SPECIFICATIONS

Wavelength (nm)	1940±1
Output power (W)	>1, 2, 3, ... , 11
Operating mode	CW
Power stability (rms, over 4 hours)	<3%, <5%, <10%
Warm-up time (minutes)	<10
M ² factor	<4
Beam divergence, full angle (mrad)	<8
Beam diameter at the aperture (mm)	<4
Beam height from base plate (mm)	96
Polarization ratio	~500:1
Operating temperature (°C)	10~35
Power supply (90-264VAC)	PSU-W-FDA
Modulation option	TTL/Analog 1Hz-5KHz, 1Hz-10KHz, 1Hz-30KHz, and TTL on/off
Expected lifetime (hours)	10000
Warranty period	1 year



MxL-W-1940	Dimensions	PSU-W-FDA	Dimensions
 <p>333(L)×140(W)×125(H) mm³, 6.1 kg</p>	 <p>140, 150, 21.50, 125, 4-5*15, 93.5, 125, 33, 300</p>	 <p>307 (L) ×168(W) ×123(H) mm³, 5.1 kg</p>	 <p>168, 123, 307, 116, 4.5, 6</p>