

HPL-532-Q/3.3~6.6mJ/50~100W

LD PUMPED ALL-SOLID-STATE AOM Q-SWITCHED LASER


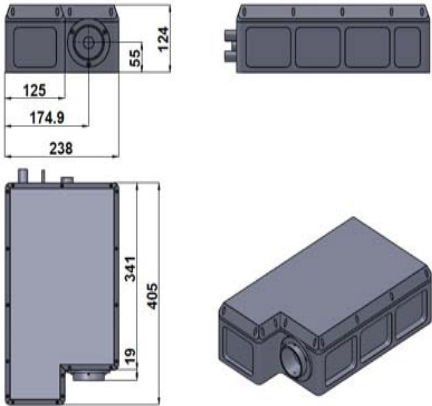


All solid state AOM Q-switched laser at 532nm has the features of high peak power, high repetition rate, and short pulse duration, which is widely used in marking, carving, measure, research, and so on.



SPECIFICATIONS

Wavelength (nm)	532±1
Operating mode	Q-switched: AOM (Acousto-Optic Modulation)
Single pulse energy (mJ)	3.3~6.6
Pulse duration (ns)	~70
Peak power (kW)	50~90
Rep. rate (kHz)	5~100, adjustable
Average power (W)	Average power (W) = Single pulse energy (mJ) * Rep. rate (kHz) 50~100@15kHz, typical
Ave power stability (over 4 hours)	<3%, <5%
Warm-up time (minutes)	<10
Beam divergence, full angle (mrad)	<3.5
Beam diameter at the aperture (mm)	~19.0
Beam height from base plate (mm)	55.0
Cooled method	Water Cooled
Operating temperature (°C)	15~35
Power supply (220/110VAC)	PSU-HPL-Q(4U)
Expected lifetime (hours)	10000
Warranty period	1 year



HPL-532-Q		PSU-HPL-Q(4U)	Water chiller
			
405 (L) × 238(W) × 124(H) mm ³ , 14kg		485 (L) × 325(W) × 92(H) mm ³ , 13kg	504 (L) × 624(W) × 905(H) mm ³ , 95kg